



LIEBHERR

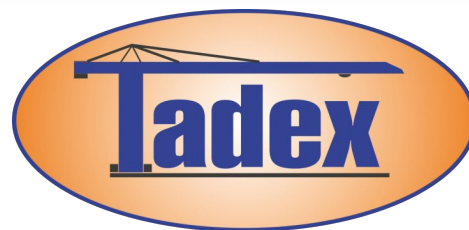

ŻURAW WIEŻOWY 140EC-H10

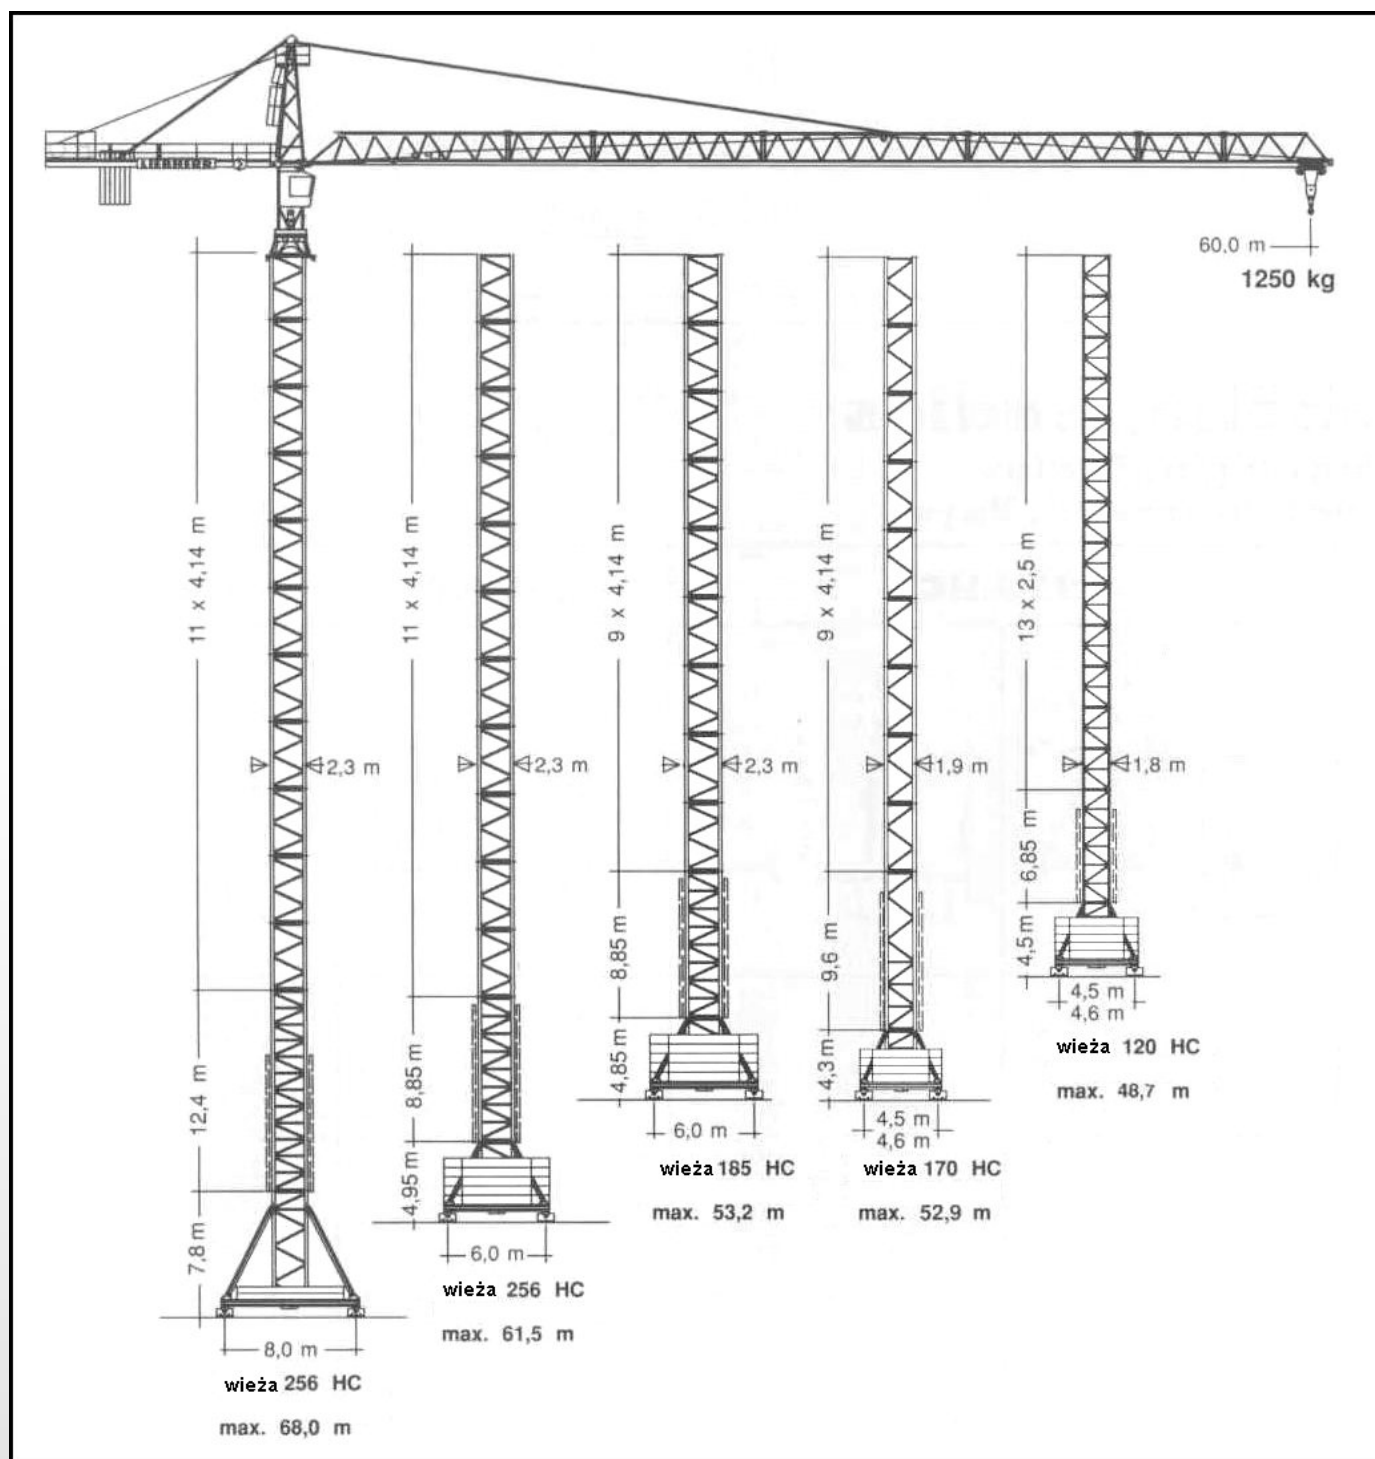


TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

LIEBHERR

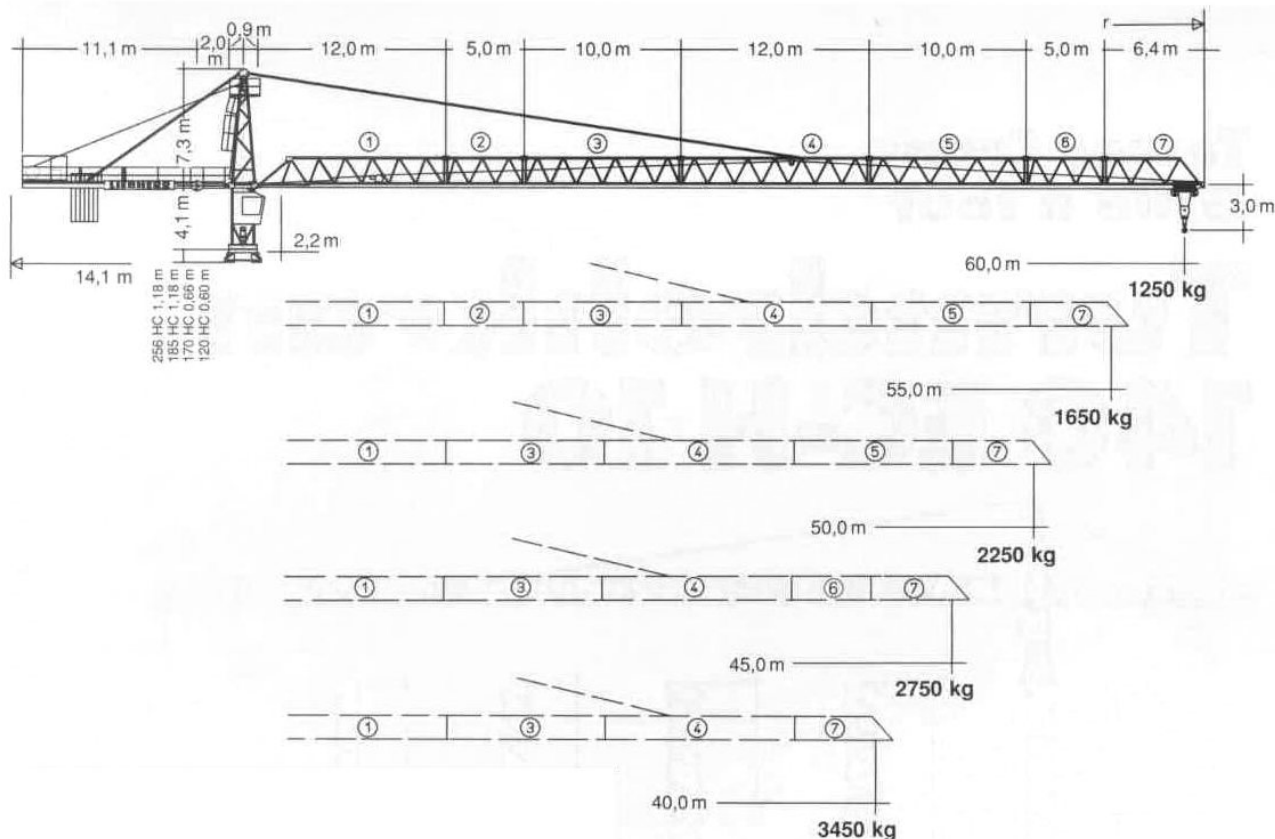

Wysokość podnoszenia:

Z wieżą	256 HC		185 HC		170 HC	
Łączenie z wstawką wieży						
0	m	14,9	22,4	m	11,3	16,1
1		19,0	26,6		15,5	20,2
2		23,2	30,7		19,6	24,3
3		27,3	34,8		23,7	28,5
4		31,4	39,0		27,9	32,6
5		35,6	43,1		32,0	36,7
6		39,7	47,3		36,1	40,9
7		43,9	51,4		40,3	45,0
8		48,0	55,6		44,4	49,2
9		52,2	59,7		48,5	53,3
10		56,3	63,8		52,7	57,4
11		60,4	68,0*		56,8*	61,5*
12		64,6*	-		-	-
Promień wnętrza krzywej		18,0 m	12,5 m		12,0 m	8,5 m

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL








Z wieżą	120 HC															
Łącznie z wstawką wieży	      															
0	a) 13,0	b) 16,2	a) 12,5	b) 15,7	a) 8,8	b) 12,0	a) 10,2	b) 13,4	a) 10,0	b) 13,2	a) 11,4	b) 14,6	a) 10,9	b) 14,1		
1	15,5	18,7	15,0	18,2	11,3	14,5	12,7	15,9	12,5	15,7	13,9	17,1	13,4	16,6		
2	18,0	21,2	17,5	20,7	13,8	17,0	15,2	18,4	15,0	18,2	16,4	19,6	15,9	19,1		
3	20,5	23,7	20,0	23,2	16,3	19,5	17,7	20,9	17,5	20,7	18,9	22,1	18,4	21,6		
4	23,0	26,2	22,5	25,7	18,8	22,0	20,2	23,4	20,0	23,2	21,4	24,6	20,9	24,1		
5	25,5	28,7	25,0	28,2	21,3	24,5	22,7	25,9	22,5	25,7	23,9	27,1	23,4	27,6		
6	28,0	31,2	27,5	30,7	23,8	27,0	25,2	28,4	25,0	28,2	26,4	29,6	25,9	29,1		
7	30,5	33,7	30,0	33,2	26,3	29,5	27,7	30,9	27,5	30,7	28,9	32,1	28,4	31,6		
8	33,0	36,2	32,5	35,7	28,8	32,0	30,2	33,4	30,0	33,2	31,4	34,6	30,9	34,1		
9	35,5	38,7	35,0	38,2	31,3	34,5	32,7	35,9	32,5	35,7	33,9	37,1	33,4	36,6		
10	38,0	41,2	37,5	40,7	33,8	37,0	35,2	38,4	35,0	38,2	36,4	39,6	35,9	39,1		
11	40,5	43,7	40,0	43,2	36,3	39,5	37,7	-	37,5	-	38,9	42,1	38,4	41,6		
12	43,0*	46,2*	42,5*	45,7*	38,8	42,0	-	-	-	-	41,4*	44,6*	40,9*	44,1*		
13	45,5*	48,7*	45,0*	48,2*	41,3*	44,5*	-	-	-	-	43,9*	47,1*	43,4*	46,6*		
14	-	-	-	-	43,8*	47,0*	-	-	-	-	-	-	-	-		
15	-	-	-	-	-	-	-	-	-	-	-	-	-	-		

Tabela udźwigu:

Długość wysięgnika		max. kg	m/kg																							
m	r		m/kg	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,0	40,0	42,0	45,0	48,0	50,0	52,0	55,0	58,0	60,0	
60,0 (r = 61,4)		2,2 – 12,0 10000	8390	7220	6310	5580	4990	4500	4080	3720	3410	3140	2900	2690	2500	2330	2170	1960	1790	1680	1580	1450	1320	1250		
55,0 (r = 56,4)		2,2 – 13,0 10000	9200	7930	6940	6150	5500	4970	4510	4120	3790	3490	3230	3000	2800	2610	2440	2220	2020	1910	1800	1650				
50,0 (r = 51,4)		2,2 – 14,6 10000	10000	9010	7900	7010	6290	5690	5180	4740	4360	4030	3740	3480	3250	3040	2850	2600	2380	2250						
45,0 (r = 46,4)		2,2 – 15,2 10000	10000	9430	8270	7350	6590	5970	5430	4980	4580	4240	3940	3670	3420	3210	3010	2750								
40,0 (r = 41,4)		2,2 – 16,1 10000	10000	10000	8810	7840	7040	6370	5810	5320	4910	4540	4220	3940	3680	3450										

Max.udźwig (kg)

10000

8000

6000

4000

2000

0

Wysięgnik m

14,0

28,0


40,0

45,0

50,0

55,0

60,0

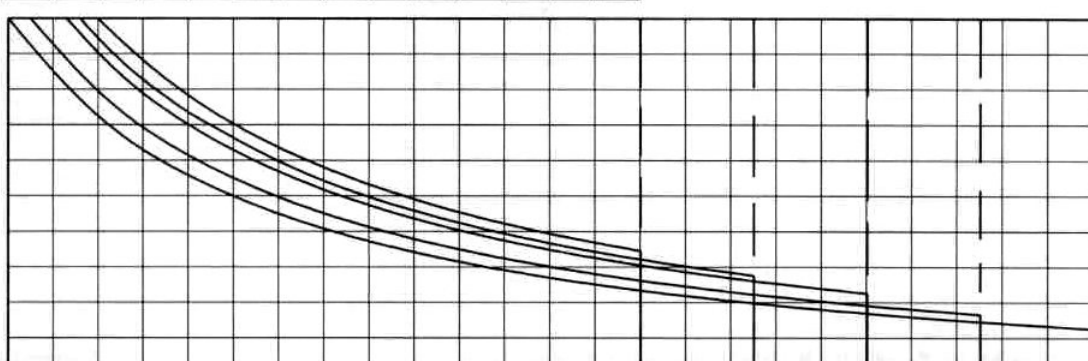

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

Tabela szybkości:

	U/min 0,9 sl./min tr./min	1 x 5,0 kW 50 / 55 / 60 m wysięgnik 2 x 5,0 kW
	11,0 / 37,0 / 75,0 m/min	5,0 kW
	25,0 m/min	2 x 3,0 kW (120 HC) 2 x 7,5 kW (256 HC) (185 HC, 170 HC)
Wymagana moc (Górna część)		wciągarka
		34 kW 45 kW
kW		49,0 60,0
kVA		54,0 67,0

Wciągarka	Moc	kg	m/min
34,0 / 30,0 kW WIW 240 RX Elmag, WSB Wysokość podnoszenia 93m (4 warstwy)	1	10000 5600	1,2 / 12,0 25,0
	2	3000 1000	5,2 / 52,0 104,0
	3	1500 400	8,7 / 87,0 174,0
45,0 kW WIW 260 JX HU-260-001 Elmag, WSB Wysokość podnoszenia 167m (6 warstw)	1	10000	1,1 / 17,0
	2	4300	3,0 / 45,0
	3	2300	5,2 / 78,0

Zasilanie elektryczne - zapotrzebowanie:

Napięcie zasilające	400V/50Hz
Przekrój poprzeczny kabla	4x35mm ²
Całkowita moc	Wciągarka 34/45kW 44 / 55kW