



LIEBHERR

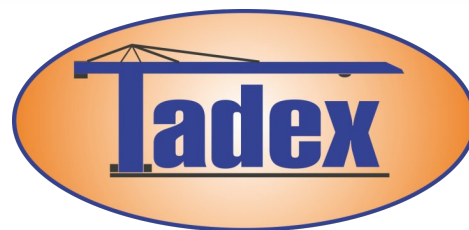

ŻURAW WIEŻOWY 180EC-H

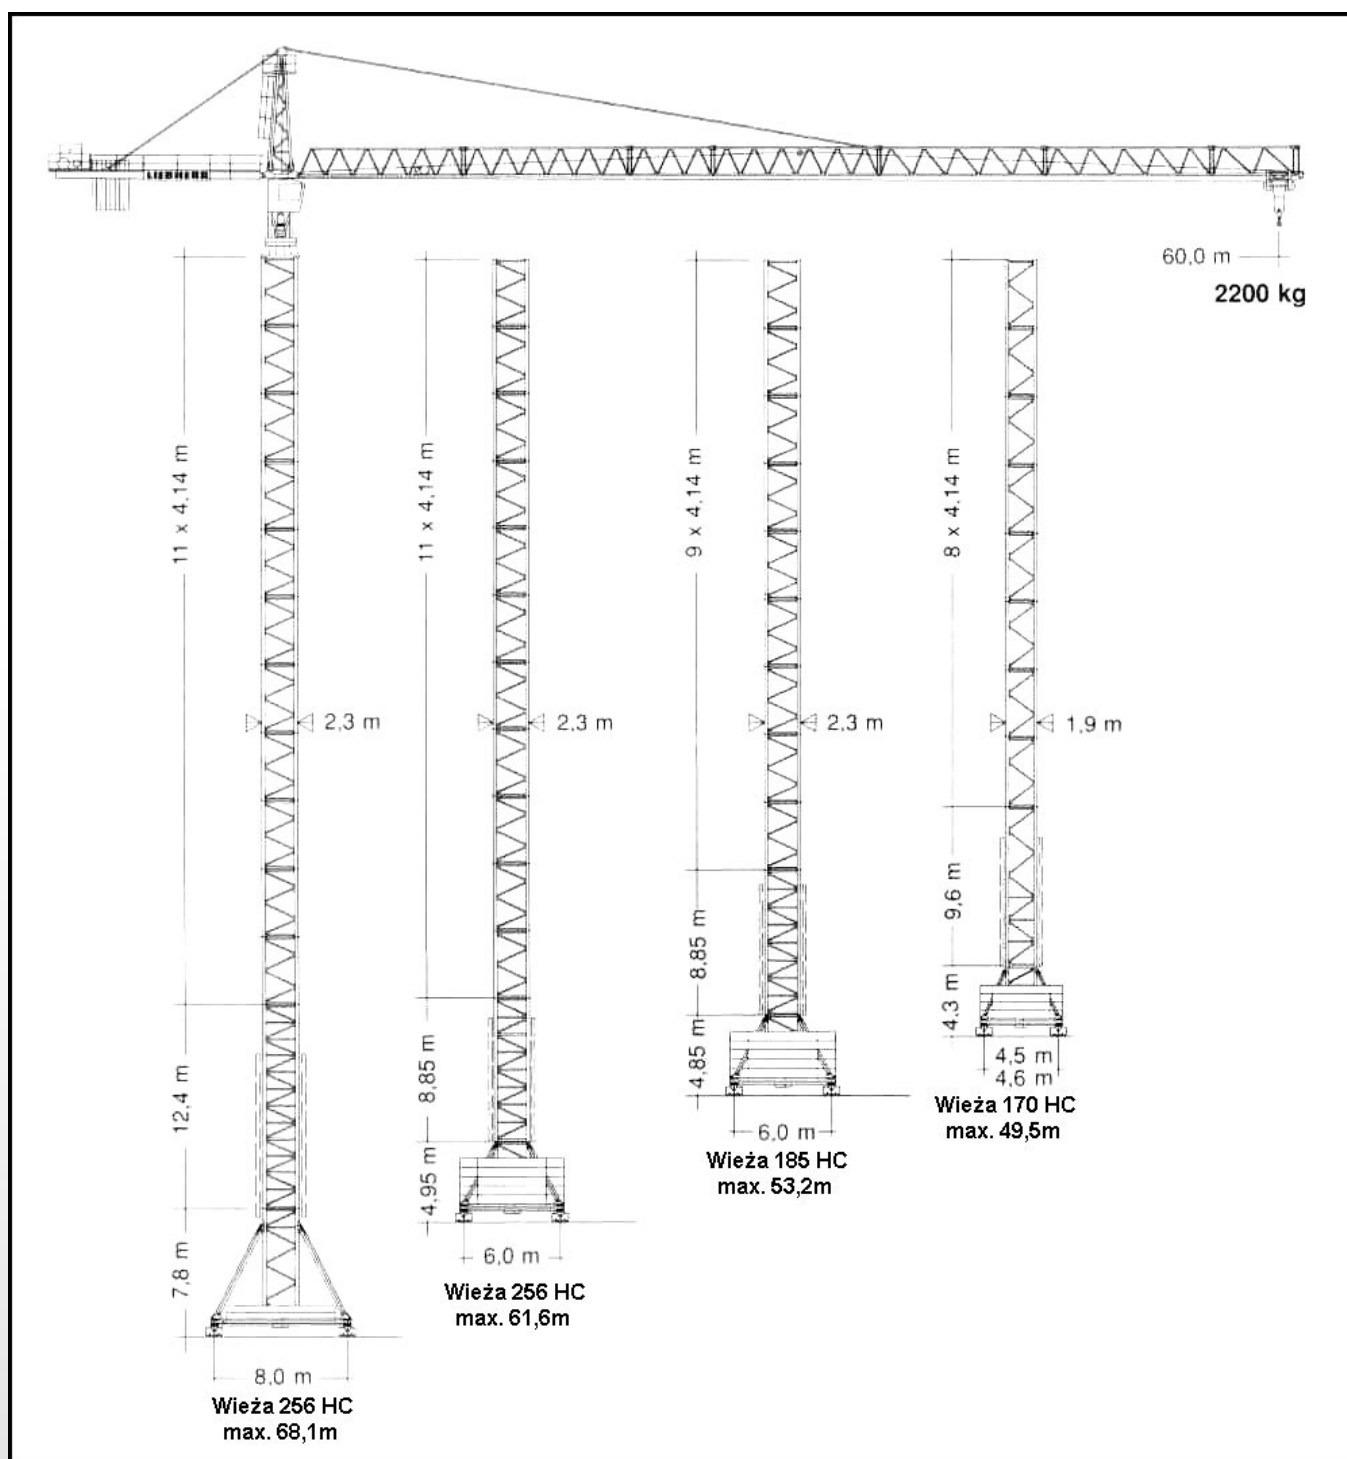


TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

LIEBHERR

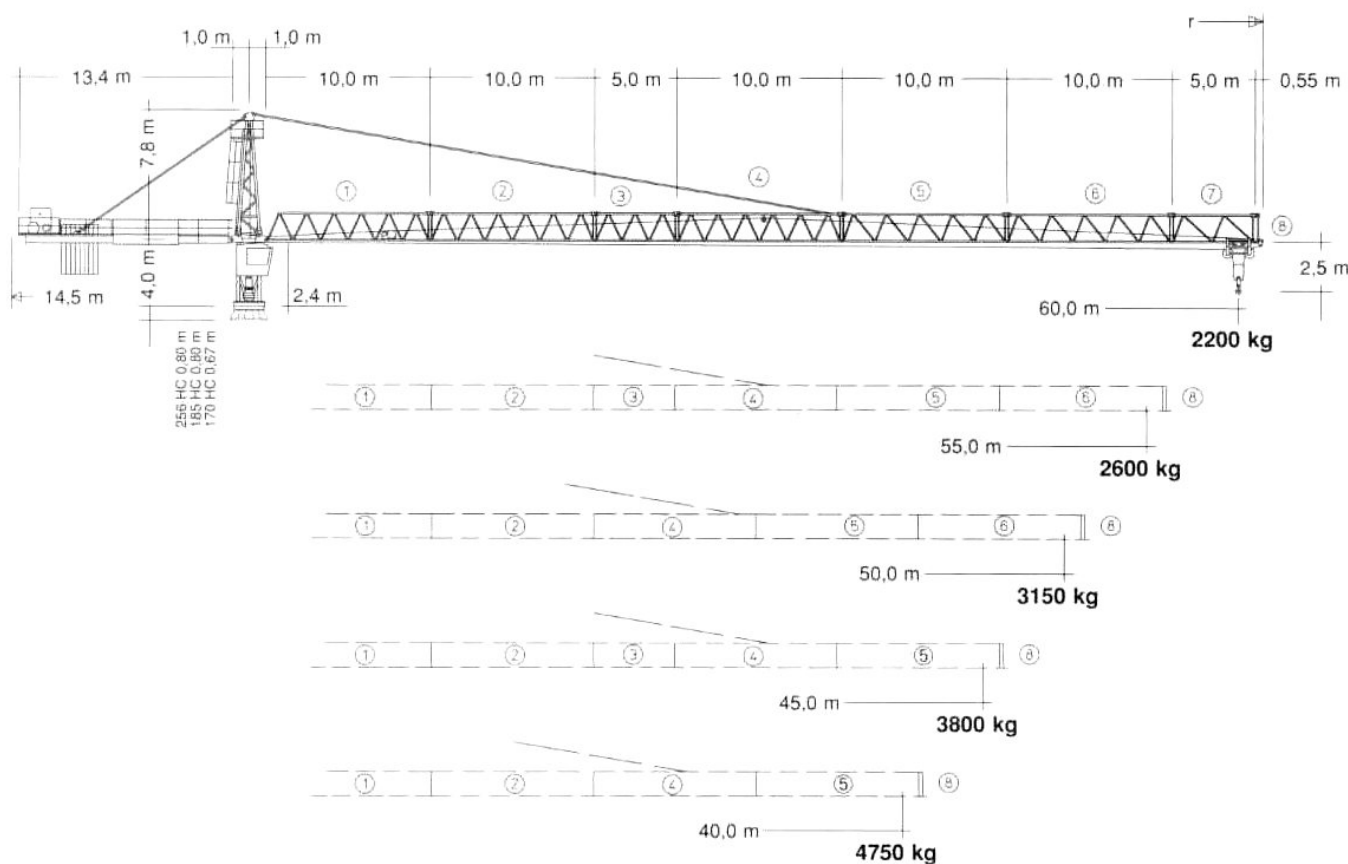

Wysokość podnoszenia:

Z wieżą	256 HC		185 HC		170 HC	
Łącznie z wstawką wieży						
0	m	14.9	22.5	m	11.4	16.1
1		19.1	26.7		15.3	20.2
2		23.2	30.8		19.6	24.3
3		27.3	34.9		23.8	28.5
4		31.5	39.1		27.9	32.6
5		35.6	43.2		32.1	36.8
6		39.8	47.4		36.2	40.9
7		43.9	51.5		40.3	45.0
8		48.0	55.6		44.5	49.2
9		52.2	59.8		48.6	53.3
10		56.3*	63.9		52.8*	57.5
11		60.5*	68.1*		-	-
12		64.6*	-		-	-
Promień wnętrza krzywej		18,0 m	12,5 m	12,0 m		8,5 m

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

Tabela udźwigu:

Długość wysięgnika		max. kg	m/kg																			
m	r		m/kg	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,0	40,0	42,0	45,0	48,0	50,0	52,0	55,0	58,0	60,0
60,0	(r = 61,6)	2,4 – 17,3 10000	8510	7640	6920	6310	5790	5340	4940	4600	4290	4010	3760	3540	3240	2980	2820	2680	2480	2300	2200	
55,0	(r = 56,6)	2,4 – 17,9 10000	8830	7930	7190	6560	6020	5550	5140	4790	4470	4180	3920	3690	3380	3110	2950	2800	2600			
50,0	(r = 51,6)	2,4 – 18,8 10000	9330	8390	7600	6940	6370	5880	5450	5080	4740	4440	4170	3930	3600	3320	3150					
45,0	(r = 46,6)	2,4 – 19,6 10000	9780	8790	7970	7280	6690	6180	5730	5340	4990	4670	4390	4140	3800							
40,0	(r = 41,6)	2,4 – 20,9 10000	10000	9450	8570	7830	7200	6660	6180	5760	5390	5050	4750									

Max. udźwig (kg)

</


Tabela szybkości:

	U/min 0 ↔ 0,7 sl./min tr./min	2 x 5,0 kW
	0 ↔ 96,0 m/min	5,5 kW, FU
	25,0 m/min	2 x 7,5 kW

Zasilanie elektryczne - zapotrzebowanie:

Napięcie zasilające	400V/50Hz
Przekrój poprzeczny kabla	4x35mm ²
Całkowita moc	53 / 60 / 80kW

Wciągarzka	Moc	kg	m/min
37,5 kW WIW 250 JX 403 Elmag, WSB Wysokość podnoszenia 113,0m (4 warstwy)	1	10000	1,1 / 16,0
	2	3200	3,3 / 50,0
	3	1500	6,0 / 90,0
45,0 kW WIW 260 JX 422 Elmag, WSB Wysokość podnoszenia 181,0m (6 warstwy)	1	10000	1,3 / 19,0
	2	4200	3,1 / 47,0
	3	2200	5,5 / 82,0
45,0 kW, FU WIW 260 MW 403 Wysokość podnoszenia z LS-bębniem 181,0m (6 warstwy)	1	10000	1,7 / 26,0
	2	4200	4,3 / 65,0
	3	2200	7,7 / 116,0



TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl