

The logo for Tadex, featuring the word "Tadex" in a bold, blue, sans-serif font. The letter "T" is stylized with a crane hook and cables integrated into its top bar. The logo is set against a light blue oval background with a darker blue border.

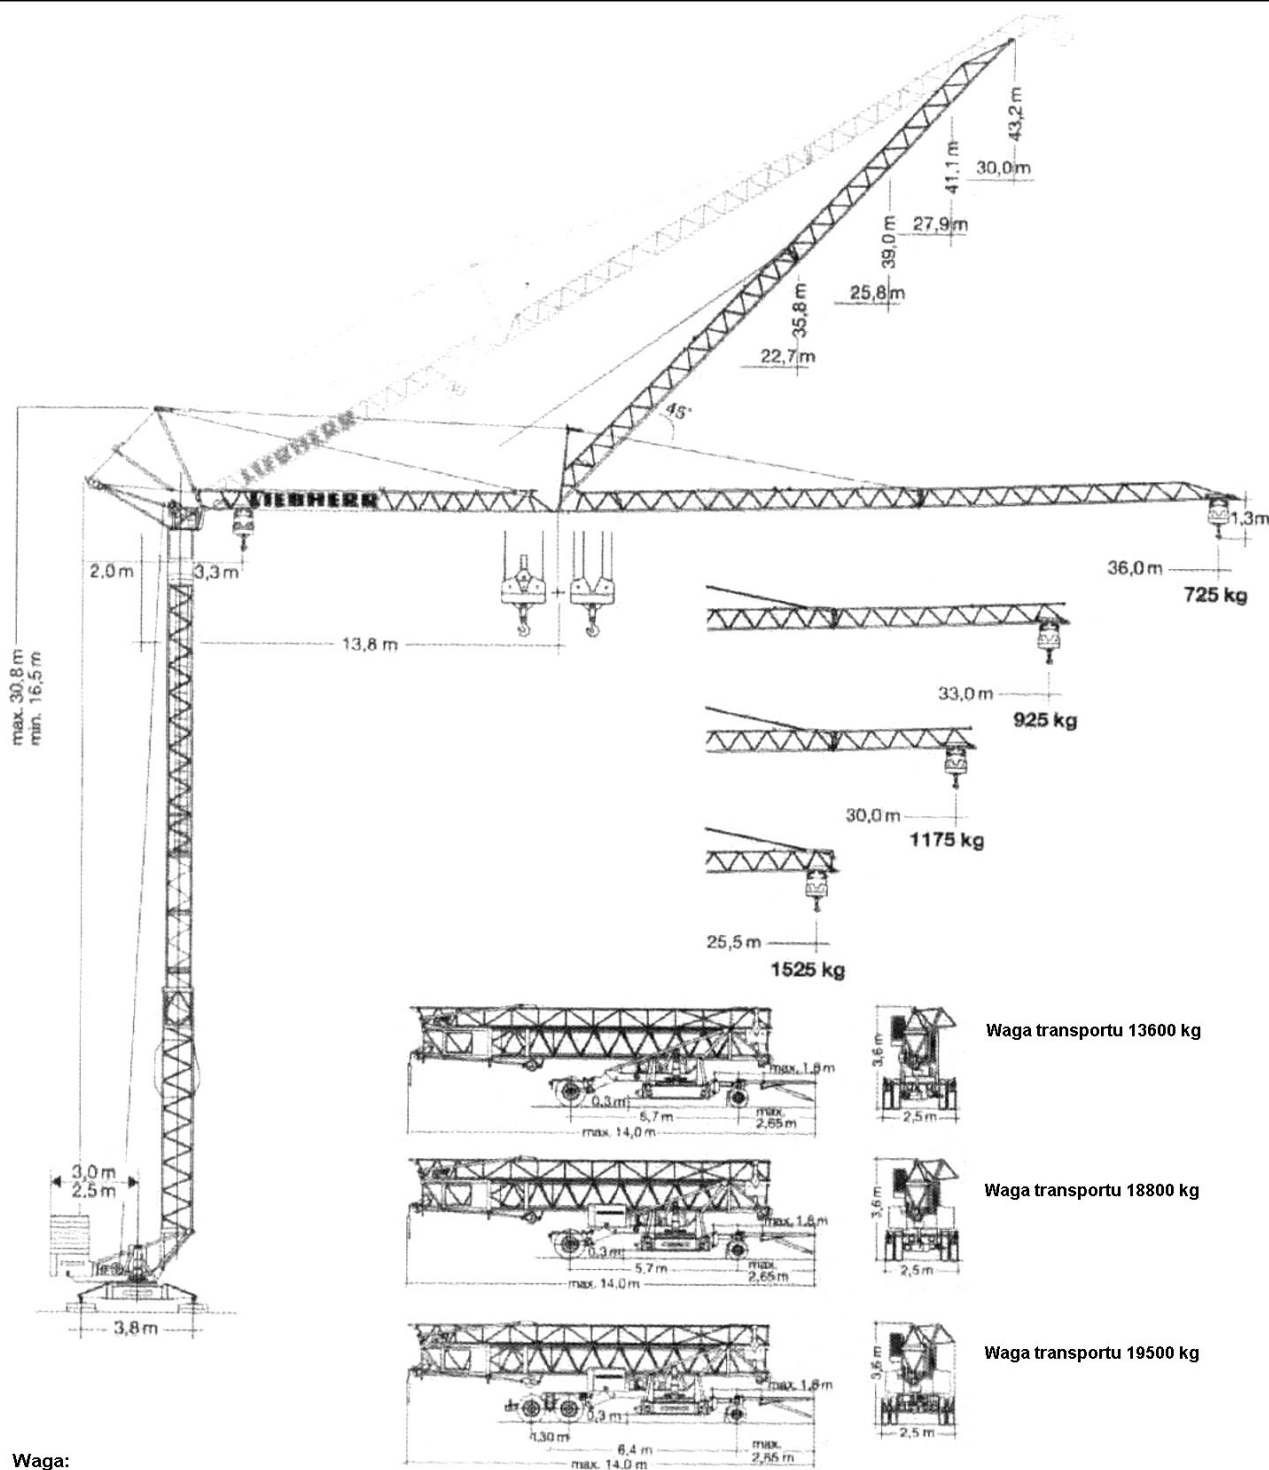
Technical drawing of a mobile crane with a telescopic boom, showing various configurations and dimensions. The main diagram shows the crane with a 45-degree boom angle. Dimensions include a 3.8m base width, a 2075 kg counterweight, and boom segments of 22.3m, 26.2m, 36.0m, 37.5m, 39.0m, and 40.5m. Load capacities are 1600 kg, 1250 kg, 1000 kg, and 800 kg. A table on the right lists boom lengths for different configurations: 11.7m, 20.0m, 22.0m, 24.0m, 26.0m, 28.0m, 30.0m, 33.0m, 36.0m, 39.0m, and 40.5m.

Ruchomy	Stacjonarny
11,7 m	20,0 m
20,0 m	22,0 m
22,0 m	24,0 m
24,0 m	26,0 m
26,0 m	28,0 m
28,0 m	30,0 m
30,0 m	33,0 m
33,0 m	36,0 m
36,0 m	39,0 m
39,0 m	40,5 m

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

LIEBHERR



Waga:

Balast centralny	1400 kg	Waga konstrukcji	10160 kg
Waga balastu	r = 3.0 m	przy max. HH 26 m; + 900 kg)	
Waga balastu	r = 2.5 m		
	19960 kg		
	23670 kg		

TADEX ŻURAWIE


62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl





WWW.DZWIGI-BUDOWLANE.PL

Tabela udźwigu:

Wysięgnik (m)	max. kg (m/kg)		m/kg																							
			16,0	17,0	18,0	19,0	20,0	21,0	22,0	23,0	24,0	25,0	25,5	26,0	27,0	28,0	29,0	30,0	31,0	32,0	33,0	34,0	35,0	36,0		
36,0	3,3 – 16,7 2075		2075	2040	1900	1780	1670	1570	1490	1410	1330	1270	1250	1210	1150	1100	1050	1010	970	930	890	860	830	800		
33,0	3,3 – 18,2 2075		2075	2075	2075	1970	1850	1740	1650	1580	1480	1410	1375	1340	1280	1230	1170	1130	1080	1040	1000					
30,0	3,3 – 19,7 2075		2075	2075	2075	2075	2040	1930	1820	1730	1640	1560	1520	1490	1420	1360	1300	1250								
25,5	3,3 – 20,5 2075		2075	2075	2075	2075	2020	1910	1810	1720	1640	1600														
(m)	max. kg (m/kg)	 + 	m/kg																							
			10,0	11,0	12,0	13,0	14,0	16,0	18,0	20,0	22,0	24,0	25,5	26,0	27,0	28,0	29,0	30,0	31,0	32,0	33,0	34,0	35,0	36,0		
36,0	3,3 – 9,8 4000	- 16,7 2000	3890	3430	3070	2770	2520	2120	1830	1600	1410	1260	1175	1130	1080	1030	980	930	890	860	820	790	750	725		
33,0	3,3 – 10,5 4000	- 18,2 2000	4000	3790	3390	3060	2790	2350	2030	1780	1570	1410	1300	1270	1210	1150	1100	1050	1010	960	925					
30,0	3,3 – 11,3 4000	- 19,7 2000	4000	4000	3730	3370	3070	2600	2240	1970	1750	1560	1450	1410	1350	1280	1230	1175								
25,5	3,3 – 11,8 4000	- 20,5 2000	4000	4000	3910	3540	3220	2730	2360	2070	1840	1650	1525													

(m)	max. kg (m/kg)		podnoszenie 30 stopni (m/kg)																		
			14,0	15,0	16,0	17,0	18,0	19,0	20,0	21,0	22,3	23,0	24,0	25,0	26,2	27,0	28,0	28,8	30,0	31,0	31,4
36,0	3,1 – 14,7 2075		2075	2030	1875	1740	1620	1510	1420	1340	1240	1190	1130	1070	1010	970	930	895	850	810	800
33,0	3,1 – 16,0 2075		2075	2075	2075	1925	1790	1680	1570	1480	1380	1330	1260	1190	1130	1080	1040	1000			
30,0	3,1 – 17,3 2075		2075	2075	2075	2075	1980	1850	1740	1640	1520	1470	1390	1320	1250						
25,5	3,1 – 18,0 2075		2075	2075	2075	2075	2075	1940	1830	1720	1600										

Tabela szybkości:

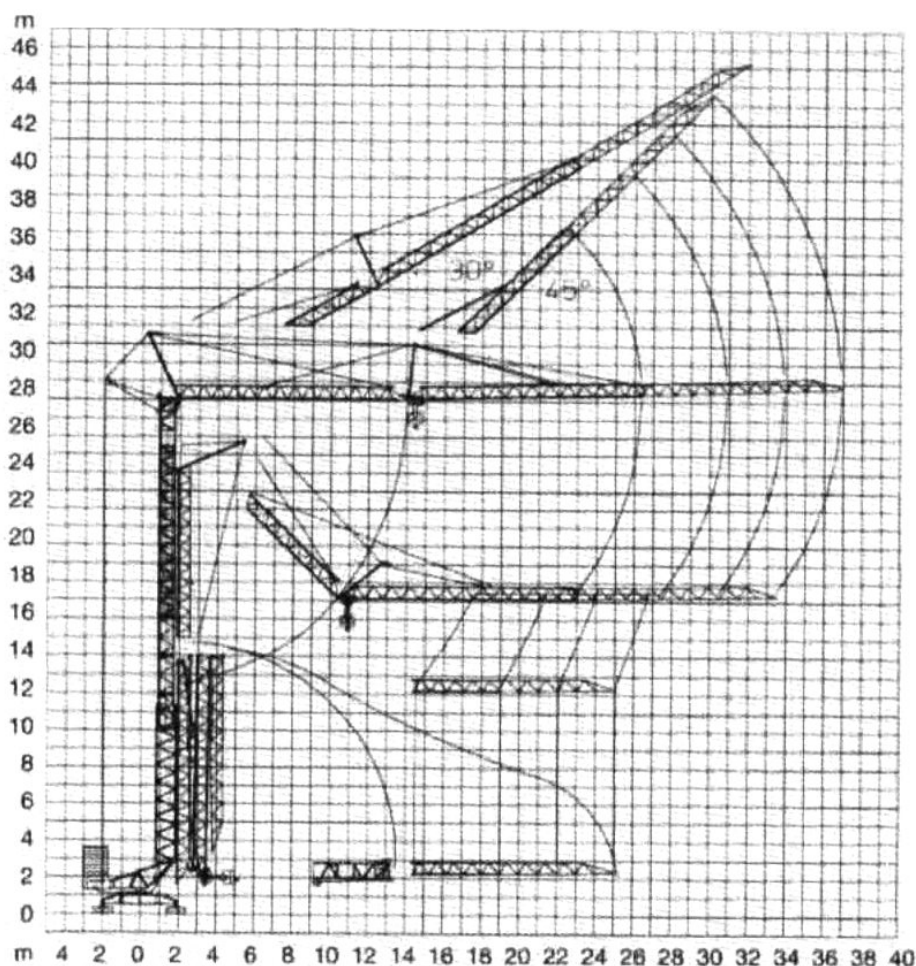
	U/min 0-1,0 sl./min tr./min	2,2 kW
	20,0 / 40,0 m/min	1,3 / 2,3 kW
	25,0 m/min	2 x 1,3 kW
	0-45° ca. 30 sec.	4,0 kW

wciągarka	moc	kg	m/min
11,0 kW 	1	2075	6,0
	2	2075	25,0
	3	1000	50,0
11,0 kW  + 	1	2000 4000	6,0 3,0
	2	2000 4000	25,0 12,5
	3	1000 2000	50,0 25,0

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

Montaż - diagram potrzebnego miejsca:



Zasilanie elektryczne - zapotrzebowanie:

Napięcie zasilające	400V/50Hz
Przekrój poprzeczny kabla	4x10mm ²
Całkowita moc	15,5kW

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl