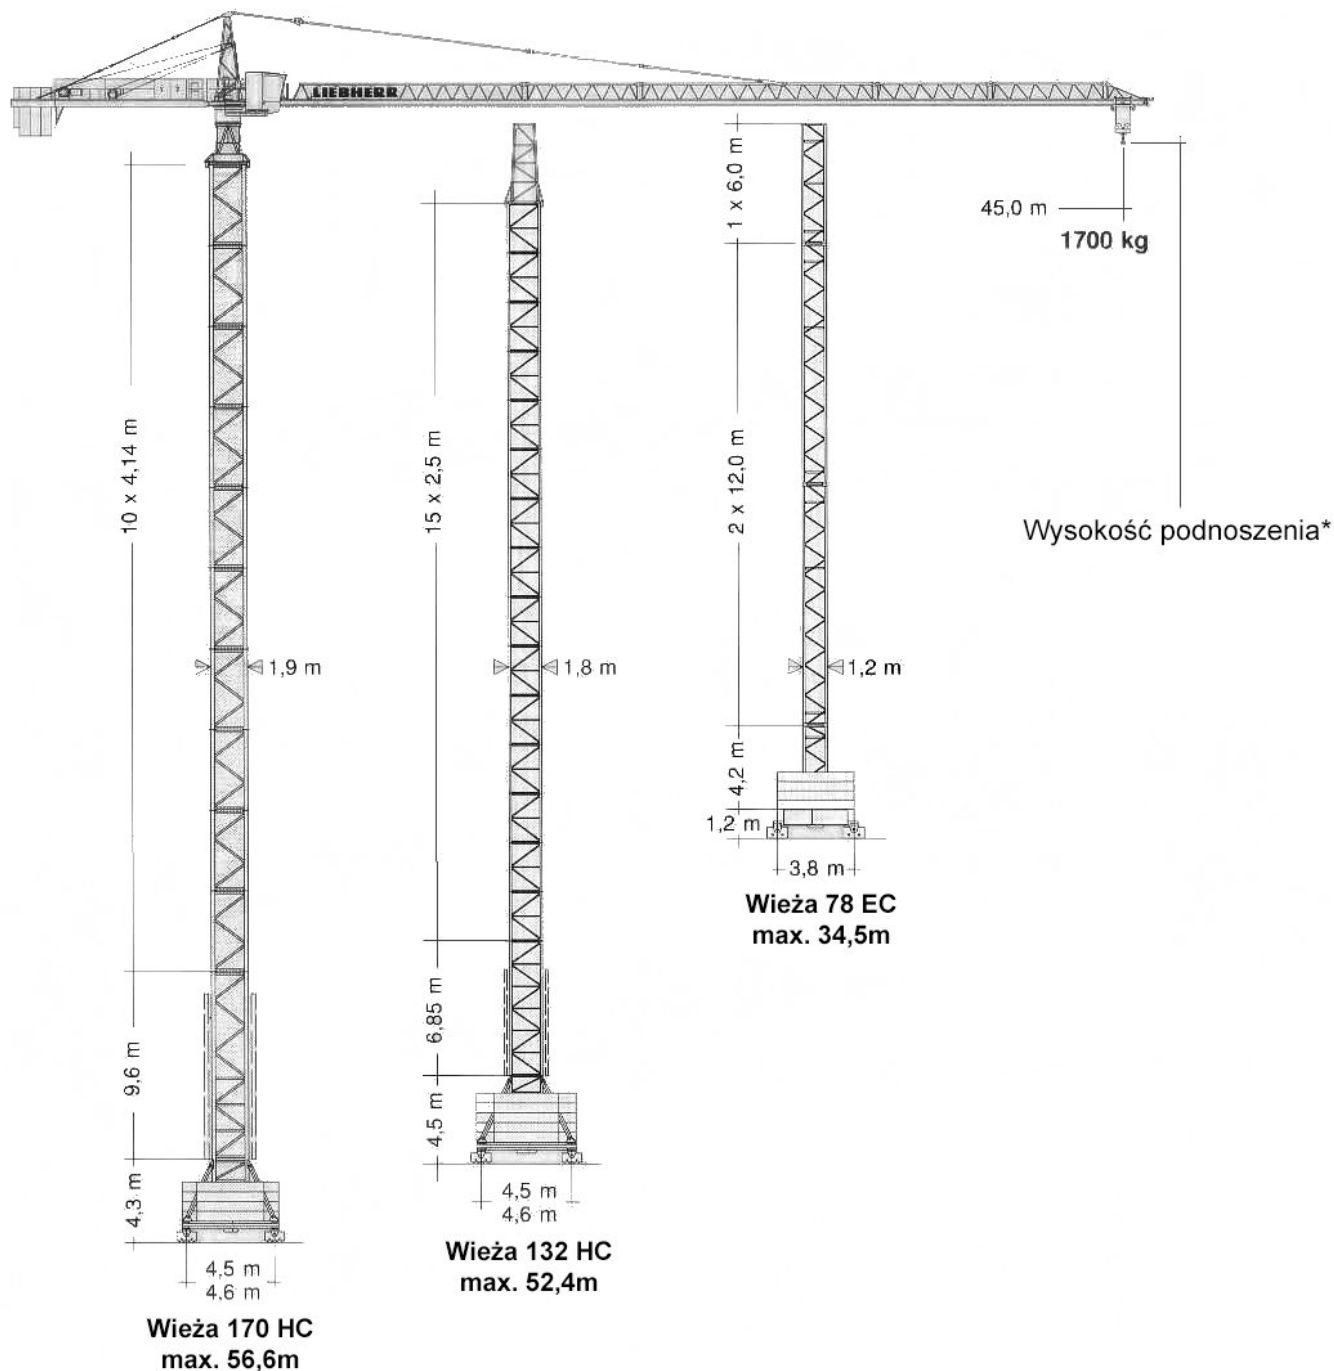


LIEBHERR



ŻURAW WIEŻOWY 78EC

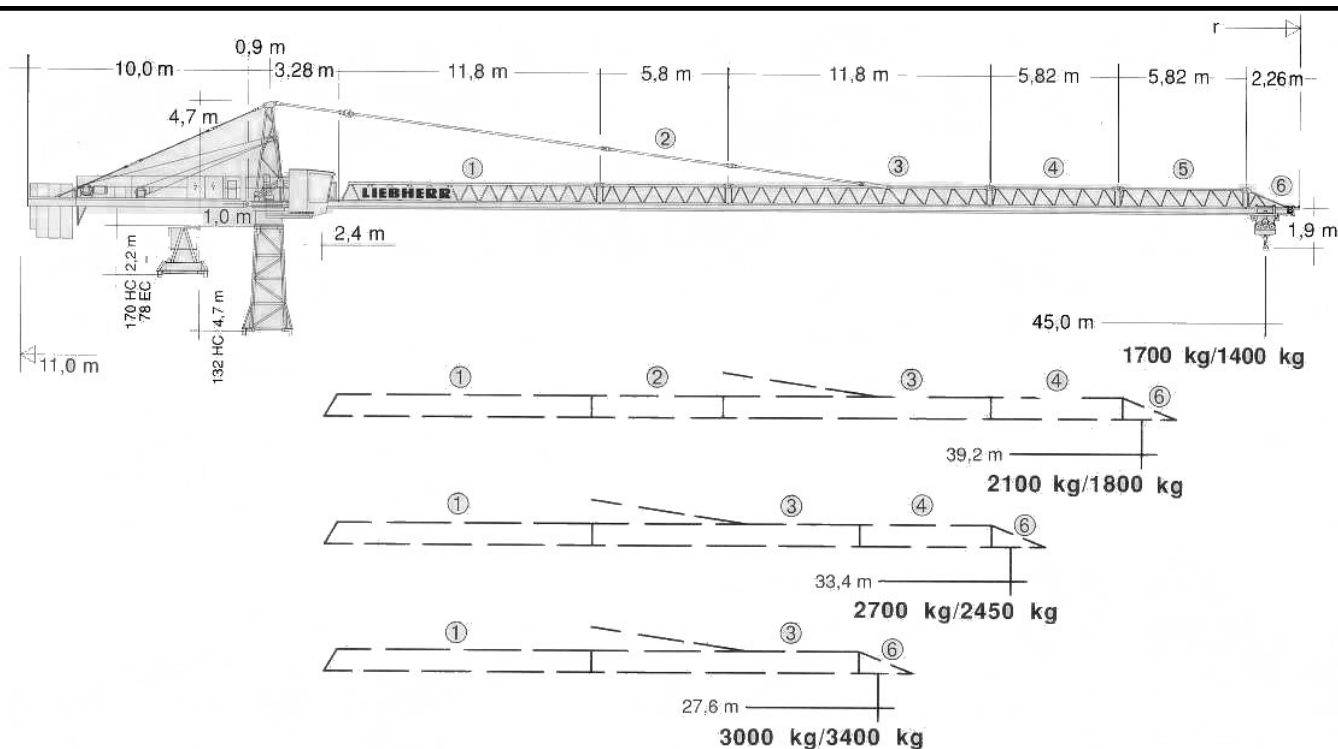


TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

LIEBHERR



Wysokość podnoszenia

z wieżą	170 HC		132 HC	
łącznie z wstawką wieży				
0	m	11,1	m	10,6
1		15,2		13,1
2		19,4		15,6
3		23,5		18,1
4		27,7		20,6
5		31,8		23,1
6		35,9		25,6
7		40,1		28,1
8		44,2		30,6
9		48,4		33,1
10		52,5*		35,6
11		56,6*		38,1
12		-		40,6
13		-		43,1
14		-		45,6
15		-		48,1*
Promień łuku wewnętrznego	8,5 m		8,5 m	






TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL


z wieżą		78 EC				
Ilość wstawek wieży		    				
6 m	12 m					
1		m 6,3	m 6,3	m 6,1	m 5,3	m 11,1
2	1	12,3	12,3	12,1	11,3	17,1
3		18,3	18,3	18,1	17,3	23,1
4	2	1) 24,3	24,3	24,1	23,3	29,1
5		30,3	30,3	30,1	29,3	35,1
6	3	—	36,3	36,1	35,3	41,1
+ Podstawowy element wieży						
4,2 m	4,2 m	2) 34,5	40,5	40,3	39,5	45,3

Udźwig i zasięg


Długość wysięgnika		max. kg 	m/kg														
m	r		m/kg					25,0	27,6	29,0	33,4	35,0	37,0	39,2	41,0	43,0	45,0
45,0	(r = 46,7)	2,4 - 27,9 3000					3000	3000	2870	2420	2290	2150	2000	1900	1790	1700	
39,2	(r = 40,9)	2,4 - 29,0 3000					3000	3000	3000	2540	2400	2250	2100				
33,4	(r = 35,1)	2,4 - 30,5 3000					3000	3000	3000	2700							
27,6	(r = 29,3)	2,4 - 27,6 3000					3000	3000									

																		
m	r	m/kg		17,0	19,0	21,0	23,0	25,0	27,6	29,0	33,4	35,0	37,0	39,2	41,0	43,0	45,0	
45,0	(r = 46,7)	2,4 – 26,6 2800	2,4 – 15,4 5600	4940	4290	3780	3370	3030	2670	2510	2090	1960	1820	1690	1590	1490	1400	
39,2	(r = 40,9)	2,4 – 27,8 2800	2,4 – 16,1 5600	5220	4530	3990	3560	3210	2830	2660	2220	2090	1940	1800				
33,4	(r = 35,1)	2,4 – 30,1 2800	2,4 – 17,3 5600	5600	4970	4380	3910	3530	3120	2930	2450							
27,6	(r = 29,3)	2,4 – 27,6 2800	2,4 – 18,4 5600	5600	5400	4770	4260	3840	3400									

Udźwig (kg)



Zasięg (m)

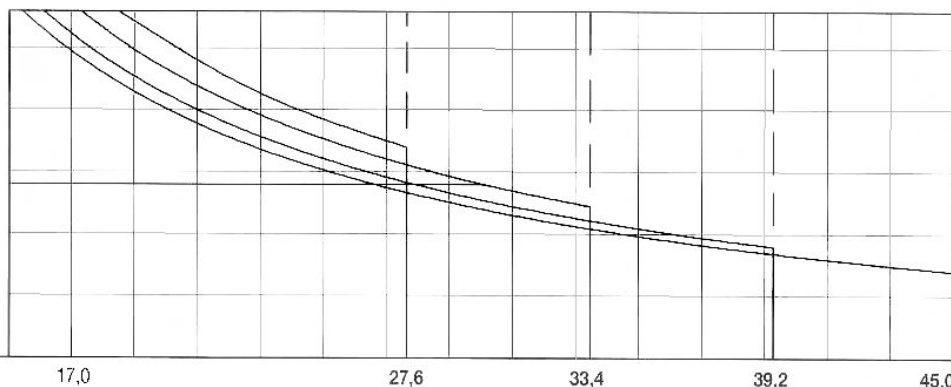

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

Prędkości

	U/min 0,85 sl./min tr./min	5,0 kW						
	8,0 / 29,1 / 54,0 m/min	3,0 kW						
	25,0 m/min	2 x 2,2 kW (78 EC) 2 x 3,0 kW (132 HC) 2 x 7,5 kW (170 HC)						
Wymagana moc całkowita kVA		<table><tr><th colspan="2">Wciągarka</th></tr><tr><td>22 kW</td><td>22 kW, FU</td></tr><tr><td>40,0</td><td>30,0</td></tr></table>	Wciągarka		22 kW	22 kW, FU	40,0	30,0
Wciągarka								
22 kW	22 kW, FU							
40,0	30,0							

Wciągarka	Bieg	kg	m/min
22,0 / 18,0 / 4,0 kW, KL. Wysokość podnoszenia z LS-bęben (4 warstwy) 60m	1	 3000	2800 7,6
	2	 3000	2800 35,3
	3	 1700	1700 70,0
	1	 5600	5600 3,6
	2	 5600	5600 17,6
	3	 3400	3400 35,0
22,0 kW, FU, Wysokość podnoszenia z LS-bęben (5 warstw) 156m	1	 2900	2800 3,7
	2	 2900	2800 37,0
	3	 2300	2100 46,0
	4	 1400	1300 70,0
	1	 5600	5600 1,9
	2	 5600	5600 19,0
	3	 4500	4500 23,0
	4	 2900	2900 35,0

Zasilanie elektryczne - zapotrzebowanie:

Napięcie zasilające	400V/50Hz
Przekrój poprzeczny kabla	4x16mm ²
Całkowita moc	30kW

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL