



LIEBHERR

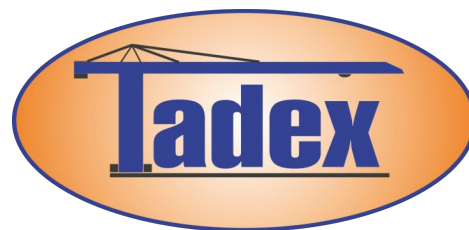

ŻURAW WIEŻOWY LH-90EC

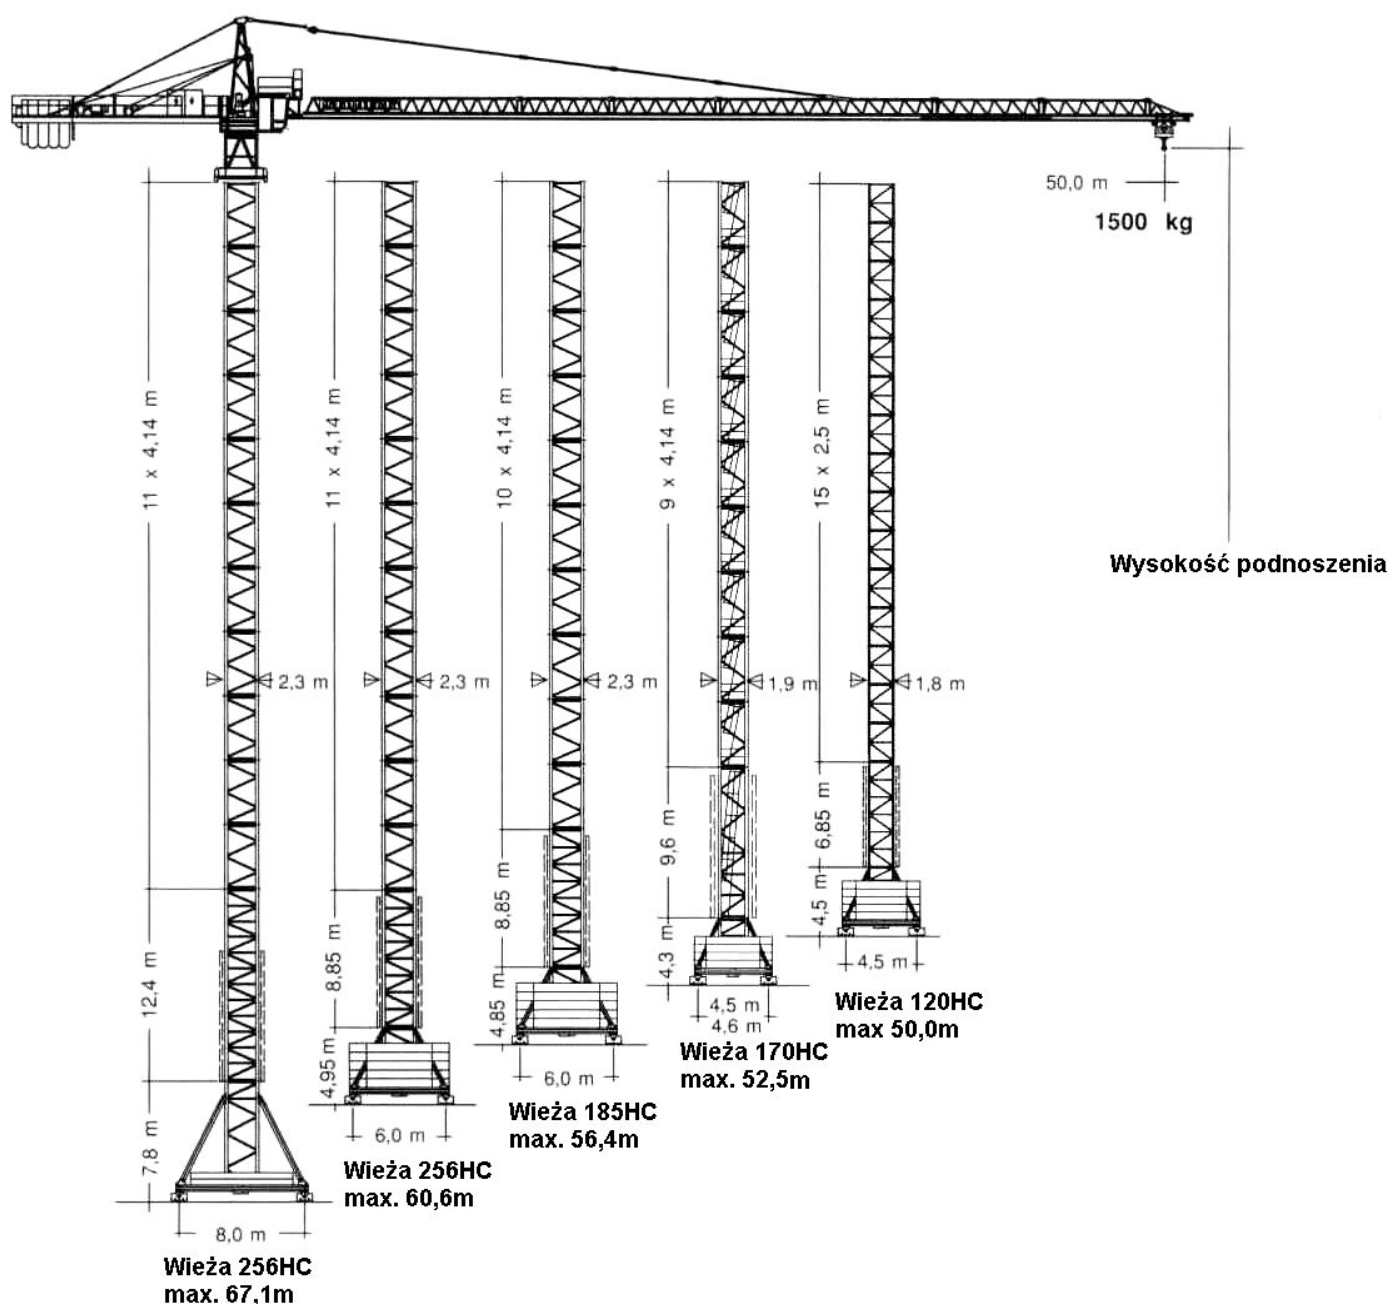


TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

LIEBHERR

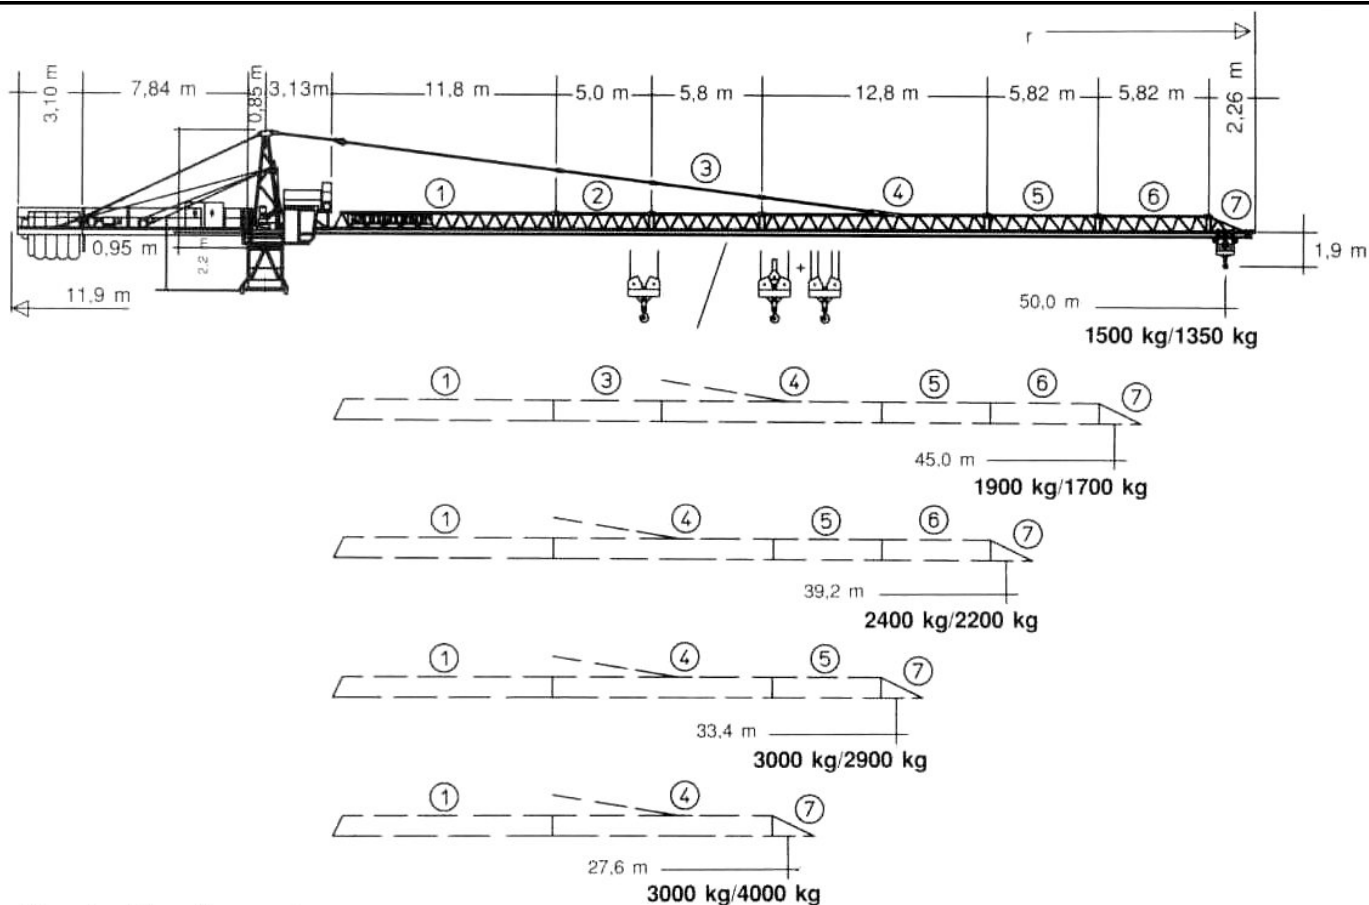

Wysokość podnoszenia:

Z wieżą	256 HC		185 HC		170 HC	
Łączenie z wstawką wieży						
0	m	14,0	21,5	m	10,4	15,1
1		18,2	25,7		14,5	19,2
2		22,3	29,8		18,7	23,4
3		26,5	34,0		22,8	27,5
4		30,6	38,1		26,9	31,6
5		34,7	42,2		31,1	35,8
6		38,9	46,4		35,3	39,9
7		43,0	50,5		39,4	44,0
8		47,2	54,7		43,5	48,1
9		51,3	58,8		47,7	52,3
10		55,4	62,9		51,8	56,4
11		59,6	67,1*		-	-
12		63,7*	-		-	-
Promień wewnątrz krzywej		18,0 m	12,5 m		12,0 m	8,5 m

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL









Z wieżą	120 HC						
Łączenie z wstawką wieży							
0	12,5	12,0	8,2	9,7	9,5	9,5	9,2
1	15,0	14,5	10,7	12,2	12,0	12,0	11,7
2	17,5	17,0	13,2	14,7	14,5	14,5	14,2
3	20,0	19,5	15,7	17,2	17,0	17,0	16,7
4	22,5	22,0	18,2	19,7	19,5	19,5	19,2
5	25,0	24,5	20,7	22,2	22,0	22,0	21,7
6	27,5	27,0	23,2	24,7	24,5	24,5	24,2
7	30,0	29,5	25,7	27,2	27,0	27,0	26,7
8	32,5	32,0	28,2	29,7	29,5	29,5	29,2
9	35,0	34,5	30,7	32,2	32,0	32,0	31,7
10	37,5	37,0	33,2	34,7	34,5	34,5	34,2
11	40,0	39,5	35,7	37,2	37,0	37,0	36,7
12	42,5	42,0	38,2	39,7	39,5	39,5	39,2
13	45,0	44,5	40,7	42,2	42,0	42,0	-
14	47,5	47,0	43,2	44,7	44,5	44,5	-
15	50,0*	49,5*	45,7*	47,2*	47,0*	47,0*	-

Tabela udźwigu:

Długość wysięgnika		max. kg 	m/kg														
m	r		m/kg						27,6	30,0	33,4	36,0	39,2	42,0	45,0	48,0	50,0
50,0	(r = 51,5)	2,4 – 29,11 3000						3000	2890	2530	2300	2070	1890	1730	1580	1500	
45,0	(r = 46,5)	2,4 – 31,29 3000						3000	3000	2770	2520	2270	2080	1900			
39,2	(r = 40,7)	2,4 – 32,7 3000						3000	3000	2930	2670	2400					
33,4	(r = 34,9)	2,4 – 33,4 3000						3000	3000	3000							
27,6	(r = 29,1)	2,4 – 27,6 3000						3000									

		 + 																
m	r	m/kg		16,0	18,0	20,0	22,0	24,0	27,6	30,0	33,4	36,0	39,2	42,0	45,0	48,0	50,0	
50,0	(r = 51,5)	2,4 – 27,0 3000	2,4 – 15,4 6000	5740	4960	4350	3870	3480	2920	2630	2300	2090	1870	1710	1560	1430	1350	
45,0	(r = 46,5)	2,4 – 28,8 3000	2,4 – 16,4 6000	6000	5350	4700	4180	3760	3160	2850	2490	2270	2030	1860	1700			
39,2	(r = 40,7)	2,4 – 30,6 3000	2,4 – 17,4 6000	6000	5740	5040	4490	4040	3400	3070	2690	2450	2200					
33,4	(r = 34,9)	2,4 – 32,5 3000	2,4 – 18,4 6000	6000	6000	5420	4820	4340	3660	3310	2900							
27,6	(r = 29,1)	2,4 – 27,6 3000	2,4 – 19,7 6000	6000	6000	5900	5260	4730	4000									

Max. udźwig

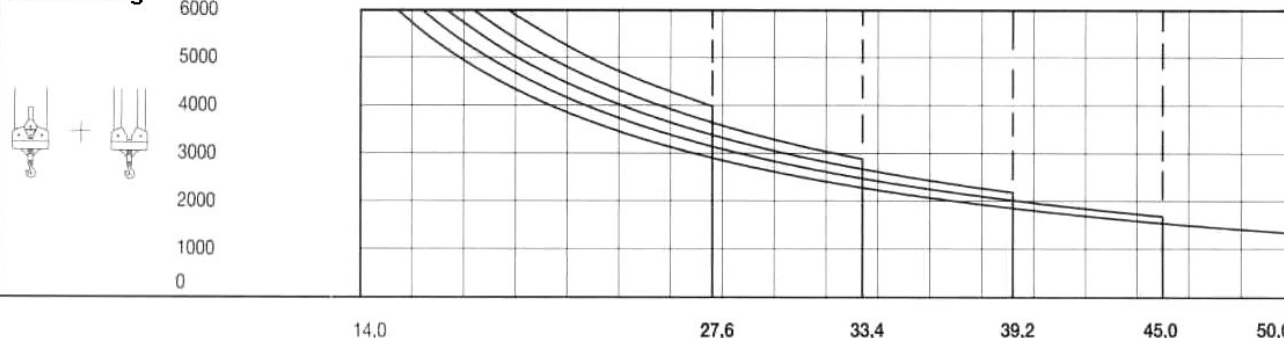

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL

Prędkości

	U/min 0,85 sl./min tr./min	5,0 kW
	8,0 / 29,1 / 54,0 m/min	3,0 kW
	25,0 m/min	2 x 3,0 kW (120 HC) 2 x 7,5 kW (256 HC, 185 HC, 170 HC)
Wymagana moc (górna część)		Wciągarka
		22 kW 26 kW 34 kW
kW		30,0 34,0 42,0
kVA		40,0 35,0 42,0

Wciągarka	Moc		kg	m/min
22,0/18,0/4,0 kW, KL wysokość podnoszenia z LS-bęben (4 warstwy) 60,0m	1		3000	7,6
	2		3000	35,3
	3		1700	70,0
	1		6000	3,9
	2		6000	17,6
	3		3400	35,0
26,0/23,0 kW, SL+WSB wysokość podnoszenia z LS-bęben (4 warstwy) 60,0m	1		3000	3,5 / 35,3
	2		1700	71,0
	1		6000	1,7 / 17,7
	2		3400	35,5
	1		4000	4,4 / 44,0
	2		1620	88,0
34,0/30,0 kW, SL+WSB wysokość podnoszenia z LS-bęben (4 warstwy) 60,0m	1		6000	2,2 / 22,0
	2		3540	44,0

Zasilanie elektryczne - zapotrzebowanie:

Napięcie zasilające	400V/50Hz
Przekrój poprzeczny kabla	4x25mm ²
Całkowita moc Wciągarka (22/26/34kW)	30/34/42kW

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358

tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL