



LIEBHERR

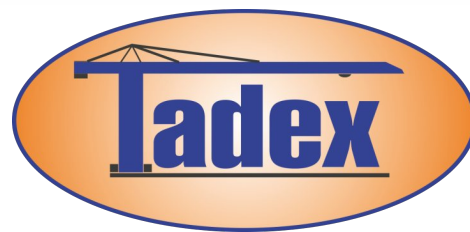

ŻURAW WIEŻOWY 420 EC-H 16 Litronic


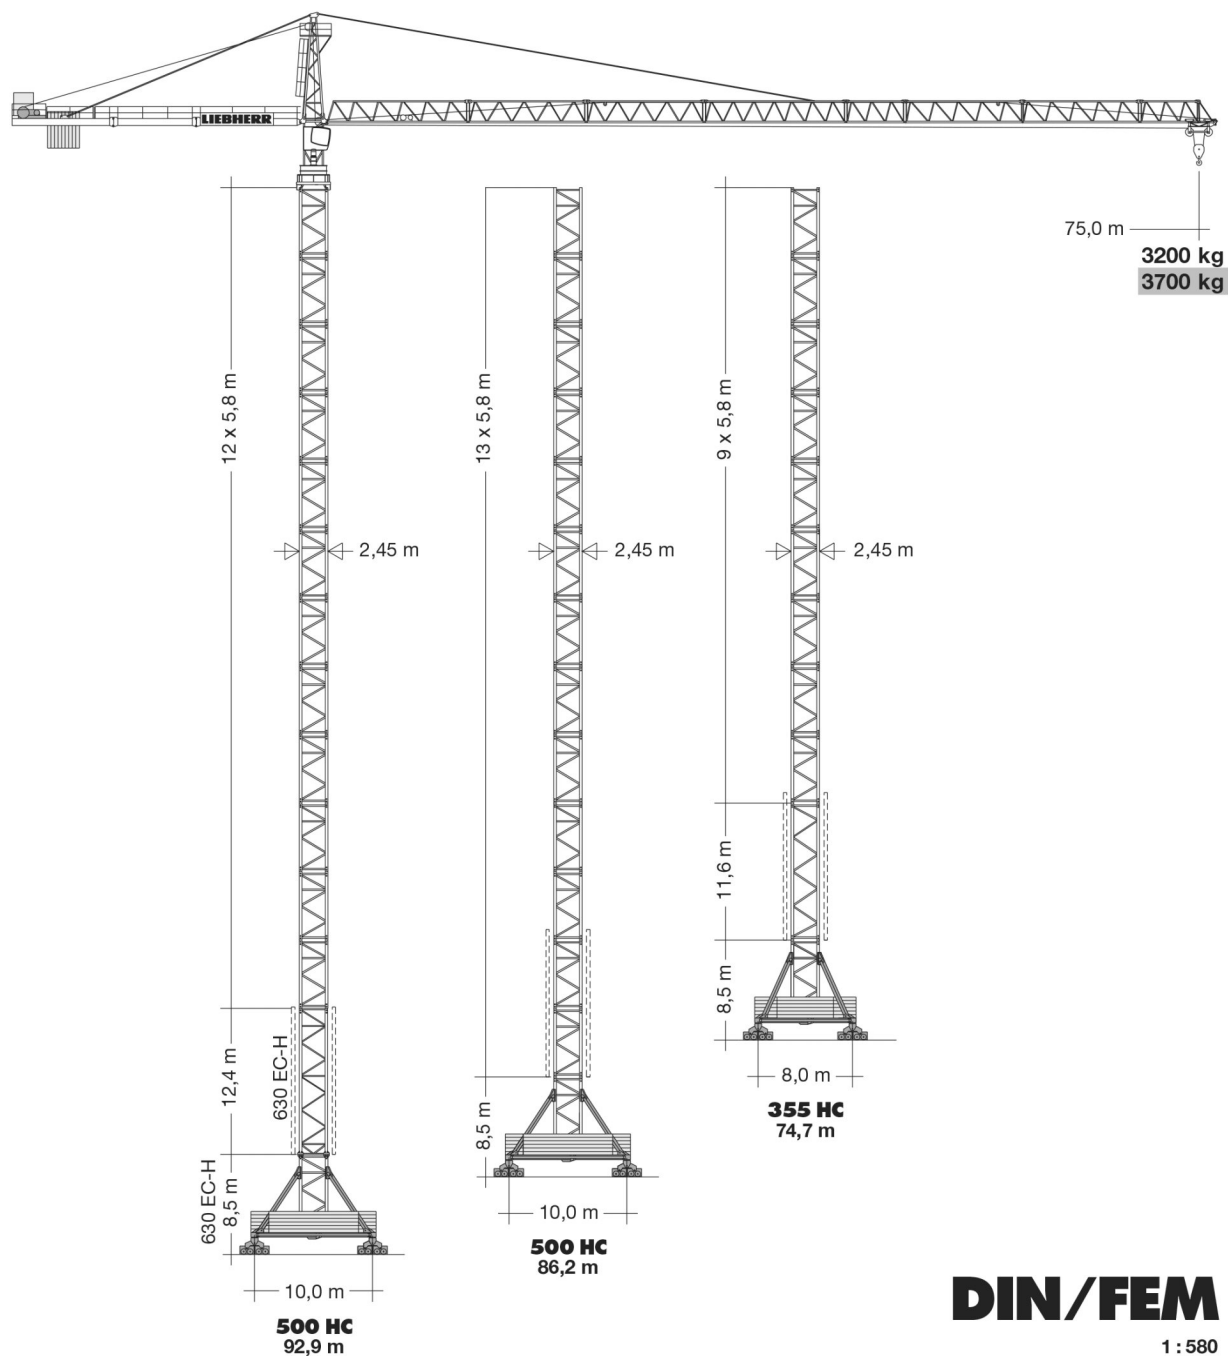


TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl







WWW.DZWIGI-BUDOWLANE.PL

LIEBHERR

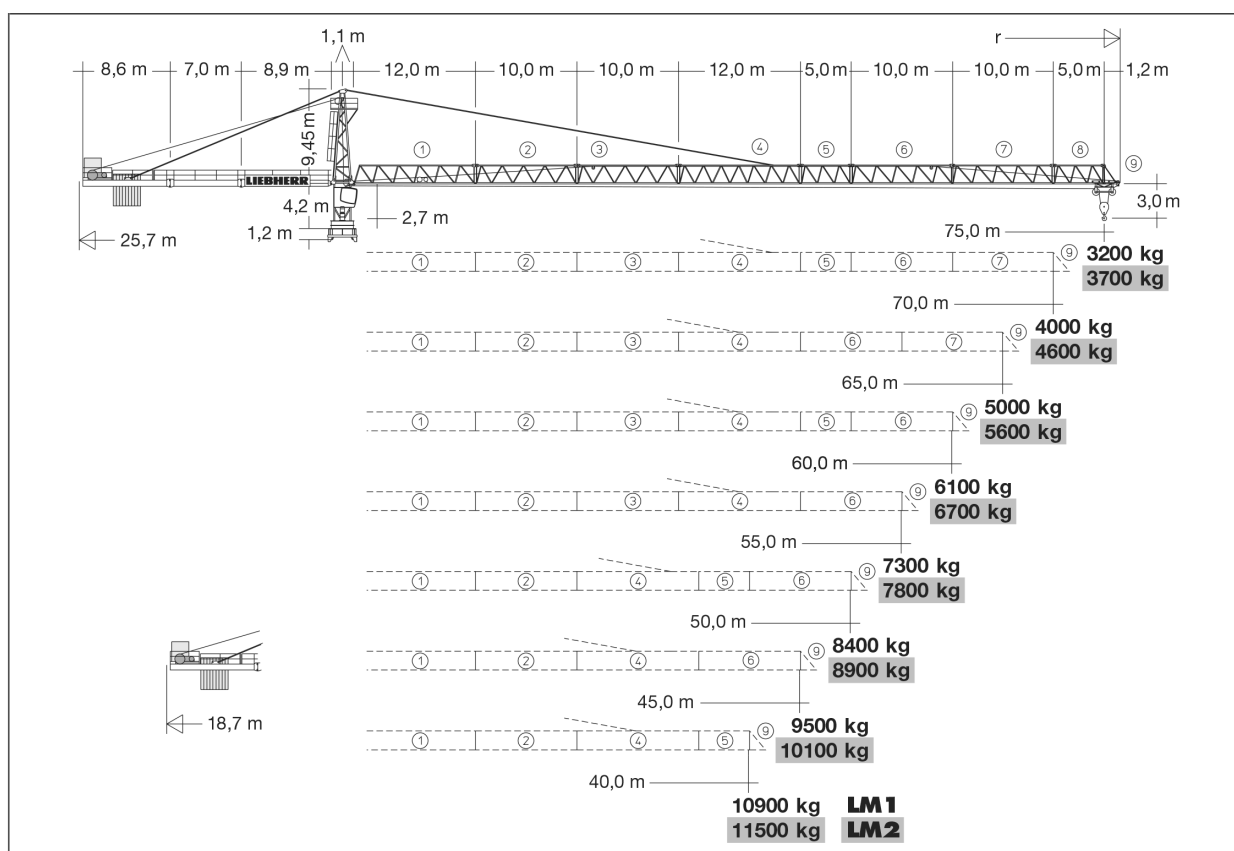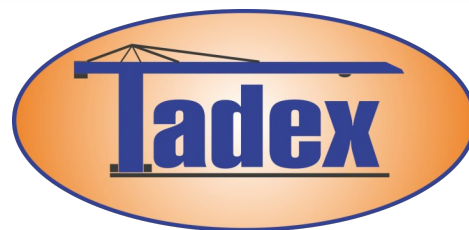

Wysokość podnoszenia

	355 HC		500 HC			
13	-	-	78,2	86,2	-	-
12	-	-	72,4	80,4	84,7	92,9
11	-	-	66,6	74,6	78,9	87,1
10	72,4	-	60,8	68,8	73,1	81,3
9	66,6	74,7	55,0	63,0	67,3	75,5
8	60,8	68,9	49,2	57,2	61,5	69,7
7	55,0	63,1	43,4	51,4	55,7	63,9
6	49,2	57,3	37,6	45,6	49,9	58,1
5	43,4	51,5	31,8	39,8	44,1	52,3
4	37,6	45,7	26,0	34,0	38,3	46,5
3	31,8	39,9	20,2	28,2	32,5	40,7
2	26,0	34,1	14,4	22,4	26,7	34,9
1	20,2	28,3	8,6	16,6	20,9	29,1
0	14,4	22,5	2,8	10,9	15,1	23,3
	m	m	m	m	m	m

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47

tel. +48 61 8 666 777; 601 149 358


tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL



Zasięg i udźwig

m r		m/kg	420 EC-H 16 FR.tronic®													
			m/kg													
		m/kg	22,0	25,0	28,0	31,0	34,0	37,0	40,0	45,0	50,0	55,0	60,0	65,0	70,0	75,0
75,0 (r=76,7)		2,7–20,7 16000	14950	12940	11370	10110	9070	8200	7460	6440	5630	4970	4410	3950	3550	3200
70,0 (r=71,7)		2,7–22,5 16000	16000	14220	12510	11130	10000	9050	8250	7150	6260	5540	4940	4440	4000	
65,0 (r=66,7)		2,7–24,3 16000	16000	15530	13690	12210	10990	9970	9110	7920	6970	6190	5550	5000		
60,0 (r=61,7)		2,7–26,2 16000	16000	16000	14880	13280	11970	10870	9940	8660	7630	6800	6100			
55,0 (r=56,7)		2,7–27,8 16000	16000	16000	15870	14180	12790	11620	10630	9270	8190	7300				
50,0 (r=51,7)		2,7–28,3 16000	16000	16000	16000	14460	13050	11870	10870	9500	8400					
45,0 (r=46,7)		2,7–28,3 16000	16000	16000	16000	14470	13060	11880	10870	9500						
40,0 (r=41,7)		2,7–28,3 16000	16000	16000	16000	14500	13090	11910	10900							

LM 1

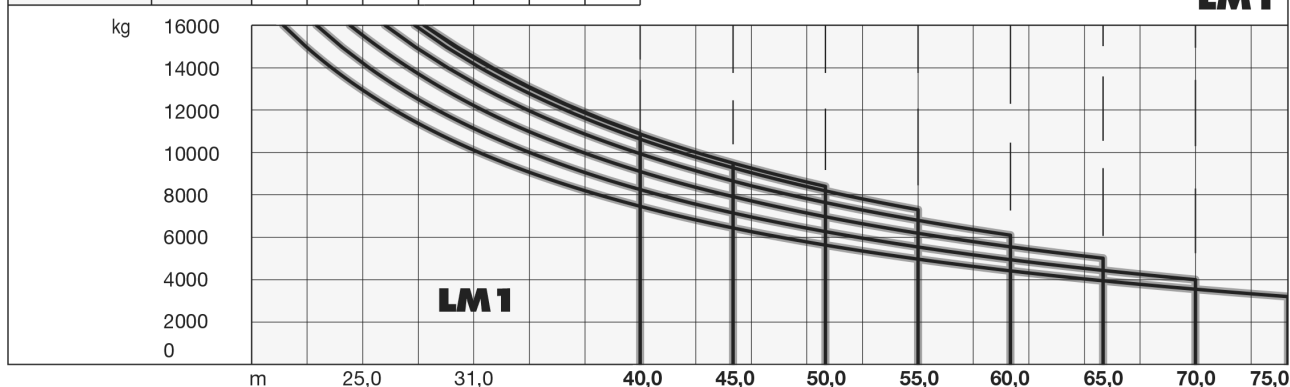

Prędkości

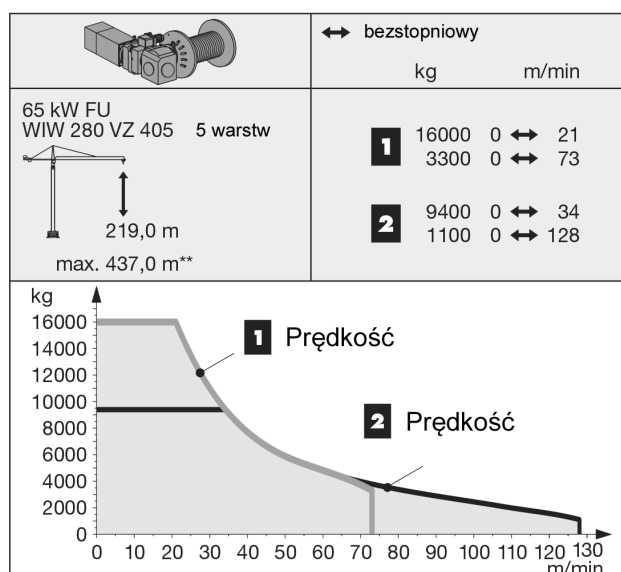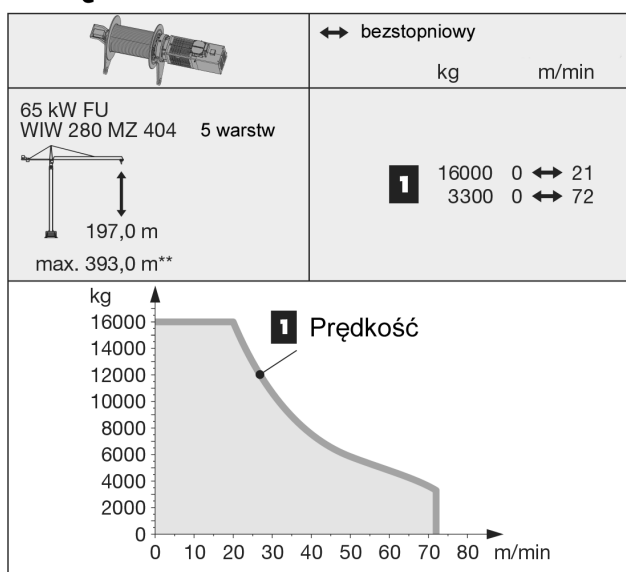

TADEX ŻURAWIE


62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl

WWW.DZWIGI-BUDOWLANE.PL


Zasięg i udźwig


		420 EC-H 16 Litronic®														
m	r	m/kg	m/kg													
			22,0	25,0	28,0	31,0	34,0	37,0	40,0	45,0	50,0	55,0	60,0	65,0	70,0	75,0
75,0	(r = 76,7)	2,7–22,8 16000	16000	14450	12720	11320	10170	9210	8390	7280	6380	5650	5040	4520	4080	3700
70,0	(r = 71,7)	2,7–24,9 16000	16000	15900	14020	12490	11240	10190	9300	8080	7110	6310	5640	5080	4600	
65,0	(r = 66,7)	2,7–26,8 16000	16000	16000	15220	13580	12230	11100	10140	8830	7780	6920	6210	5600		
60,0	(r = 61,7)	2,7–28,4 16000	16000	16000	16000	14540	13110	11910	10890	9490	8370	7460	6700			
55,0	(r = 56,7)	2,7–29,5 16000	16000	16000	16000	15150	13660	12410	11350	9910	8750	7800				
50,0	(r = 51,7)	2,7–29,9 16000	16000	16000	16000	15390	13880	12620	11550	10080	8900					
45,0	(r = 46,7)	2,7–30,0 16000	16000	16000	16000	15430	13920	12650	11570	10100						
40,0	(r = 41,7)	2,7–29,8 16000	16000	16000	16000	15330	13830	12570	11500							

LM1 + LM2

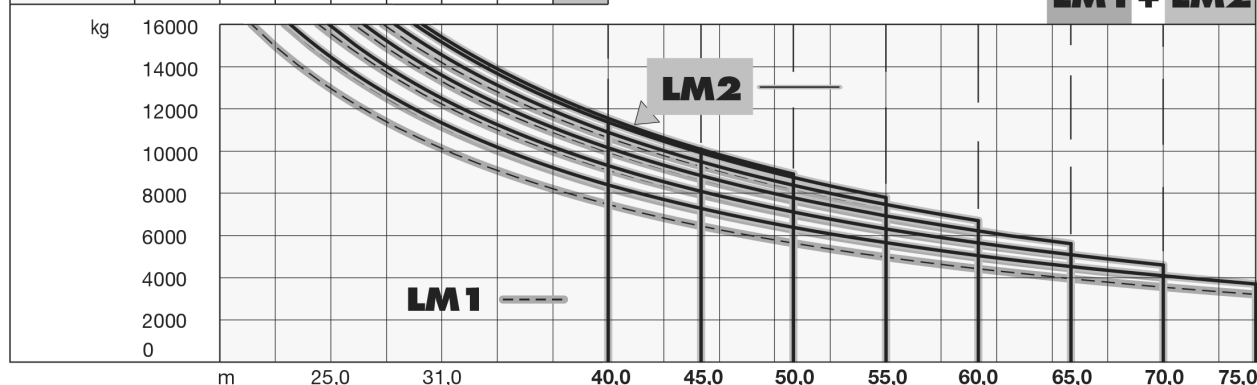

Prędkości

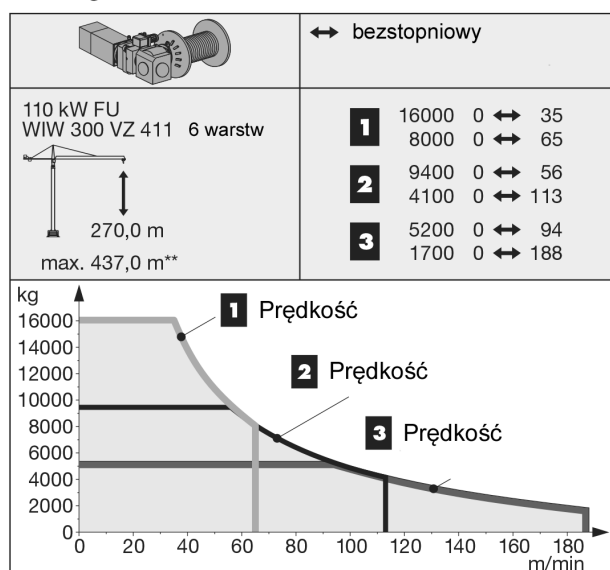

	U/min 0 ↔ 0,7 sl./min tr./min	2 x 7,5 kW FU
	0 ↔ 91,0 m/min	10,5 kW FU
	25,0 m/min	4 x 7,5 kW 500 HC (550 HC) 4 x 5,5 kW 355 HC (390 HC)

Zasilanie elektryczne - zapotrzebowanie:

Napięcie zasilające	400V/50Hz
Przekrój poprzeczny kabla	4x50mm ²
Całkowita moc	65/110kW
Wciążarka	
90 / 135kW	

TADEX ŻURAWIE

62-030 Luboń, ul. Dworcowa 47
tel. +48 61 8 666 777; 601 149 358
tadex@dzwigi-budowlane.pl